

Connecting operation

1. Connect 1 HDMI cable from HDMI source devices into HDMI Splitter input.
2. Connect 2 HDMI cables from displays (monitors or projectors) into the HDMI Splitter outputs.
3. Connect 5V power supply to the HDMI 1x4 Splitter.

Package Accessories


1. HDMI Splitter 1x4
- 2 Power Adapter
- 3 User Manual

USER MANUAL

HDMI 1x4 Splitter INTRODUCTION

HDMI Splitter 1x4

The HDMI Splitter 1x4 uses a single HDMI source, accessing to multiple HDMI sinks. The splitter allows one HDMI device to be split easily to two HDMI compatible monitors or projectors. The splitter can also be placed at the end of a long HDMI cable to regenerate the HDMI signal. The HDMI Resolution up to 3840x2160/30Hz.

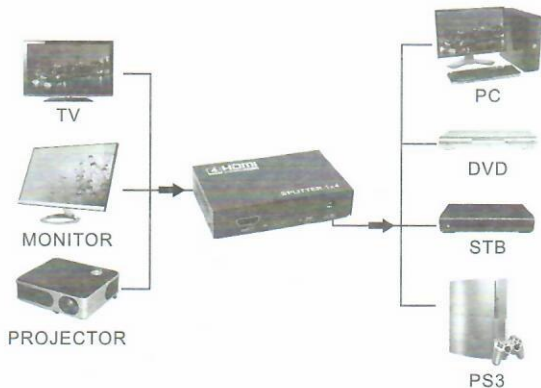

FEATURES

1. Support HDMI 1.4b
2. Support Full 3D
3. Support HDMI resolution up to 3840x2160/30Hz
4. Support the max baud rate of 3.4G and max bandwidth of 340Mhz
5. Support deep color 8/10/12bit
6. Support input up to 8 metres AWG26 HDMI standard cable length, output up to 8 metres AWG26 HDMI standard cable length
7. Displaying single source, multi-output high-definition signal source from DVD player A / V receiver, se-top box
9. 5V power adapter

SPECIFICATIONS

HDMI version	HDMI 1.4b
HDMI resolution	UP TO 3840x2160/30Hz
Support video color format	8/ 10/12bit deep color
Support audio format	DTS-HD/Dolby-trueHD/DTS/Dolby-AC3/DSD
Max bandwidth	340MHz
Max baud rate	3.4Gbps
Input cable distance	≤ 8m AWG26 HDMI standard cable
Output cable distance	≤ 8m AWG26 HDMI standard cable
HDMI input	1 HDMI
HDMI output	4 HDMI
Max working current	500mA
Specifications of power adapter	Input:AC (50Hz, 60Hz) 100V-240V;output: DC5V
Operating Temperature range	(-15 to +55°C)
Operating Humidity range	5 to 90%RH (No Condensation)
Dimension (L x W x H)	105x50x20mm
Weight	120g