



### Key Feature

- Indoor Station:
- User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- Standard PoE
- Views live video of door stations and linked cameras
- Villa Door Station:
- Standard PoE
- 2 MP HD Camera
- Noise suppression and echo cancellation
- Low illumination
- Access control functions
- Tamper-proof
- Configuration remotely via Web
- 2.4 GHz Wi-Fi

### Specification

Door station	
Camera	2MP HD camera
Resolution	Main stream: 1920 × 1080p, 720p Sub stream: 704 × 576
Night vision	Low illumination IR supplement mode:3 m
WDR	True WDR
Field of view	Horizontal: 129 ° Vertical: 75°
Video Compression Standard	H.264

Stream	Main stream: 1080p@30fps, 720p@25fps Sub stream: D1@25fps
Motion detection	Support
BLC	Support
DNR	Support
Anti-flicker frequency	50 Hz, 60 Hz
Door station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U
Audio compression Rate	64 Kbps
Audio intercom	Two-way audio communication
Door station	
RS-485	1
Alarm input	4
Debugging port	1
Grounding	1
TAMPER switch	1
Door station	
Power consumption	< 10 W
Working temperature	-40 ° C to +53 ° C (-40 ° F to 127.4 ° F)

Working humidity	10% to 95%
Dimension	138 mm × 65 mm × 27 mm
Installation	Surface mounting
Protection level	IP65
Button	1
Indicator	2
Power supply	IEEE802.3af, standard PoE 12 VDC

<b>Door station</b>	
Operation system	Embedded Linux operation system
Operation mode	Single-button
Flash	16 M, 32 M
RAM	256 M

<b>Door station</b>	
Relay	1
Reading frequency	13.56 MHz

<b>Door station</b>	
Network protocol	TCP/IP, RSTP
Wired network	10/100 Mbps Ethernet

<b>Indoor station</b>	
Display screen	7-inch TFT LCD
Display resolution	1024 × 600
Operation method	Capactive touch

<b>Indoor station</b>	
Audio input	Build-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711U, G.711A
Audio compression Rate	64 Kbps

<b>Indoor station</b>	
Network interface	RJ45, standard PoE for power supply
RS-485	1(Reserved)
Alarm input	8 zones
Relay output	2(Reserved)
Power input	2 pins


<b>Indoor station</b>	
Power supply	12 VDC or standard PoE
Power consumption	≤ 6 W

Working temperature	-10 ° C to 50 ° C (-14 ° F to 122 ° F)
Working humidity	0% to 90%
Dimensions (W × H × D)	200 mm × 140 mm × 15.1 mm (7.87" × 5.51" × 0.59")
Installation	Wall mounting
Weight	683 g (with packaging) 355 g (without packaging)

<b>Indoor station</b>	
Operation system	Embedded RTOS operation system
Memory	64 MB
Flash	16 MB

<b>Indoor station</b>	
Wired network	10/100 Mbps self-adaptive
Protocol	TCP/IP, SIP, RTSP


## Physical Interface

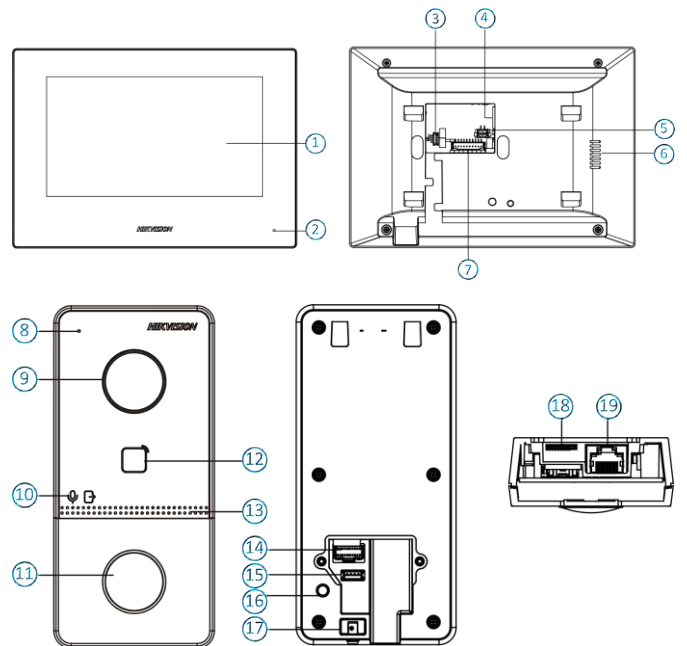

No.	Description	No.	Description
1	Screen	11	Button
2	Microphone	12	Card Reading Area
3	Debugging Port	13	Loudspeaker
4	Network Interface	14	Terminals

5	Power Terminal	15	Debugging Port
6	Loudspeaker	16	TAMPER
7	Alarm Terminal	17	Set Screw
8	Microphone	18	TF Card Slot
9	Camera	19	Network Interface
10	Indicator		

**Dimension**

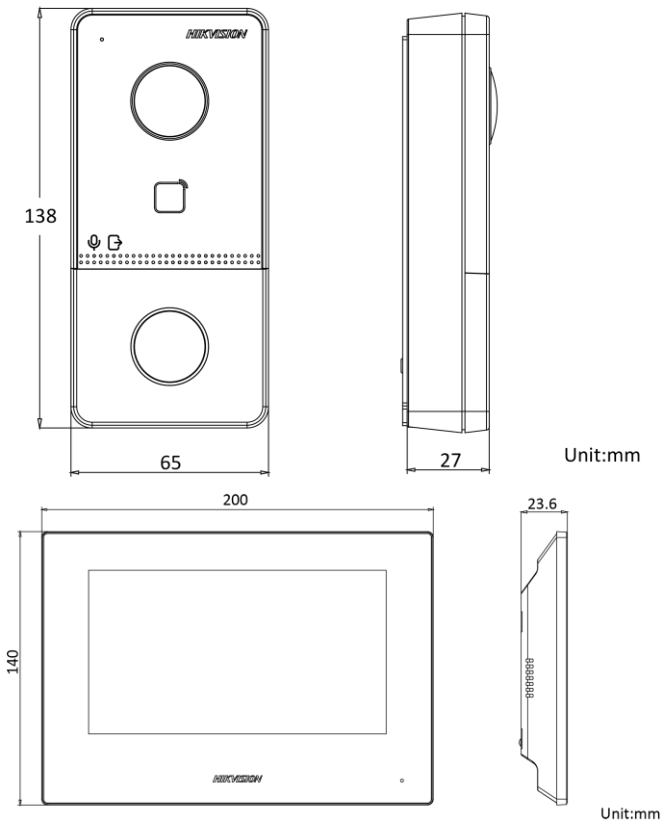

**Available Model**

DS-KIS605-P

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28468900  
sales@pramehikvision.com

**Hikvision Canada**  
T +1-866-200-8690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730867  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesmc@hikvision.com

**Hikvision Singapore**  
T +65-6884-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-18-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7 495 669 67 99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com